



Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

State of West Virginia  
Solicitation Response

Proc Folder : 683523  
Solicitation Description : ADDENDUM 1  
Proc Type : Agency Purchase Order

Date issued	Solicitation Closes	Solicitation Response	Version
	2020-05-15 14:30:00	SR 0803 ESR04162000000006023	1

<b>VENDOR</b>
VS0000011946 Greenwood enterprises LLC

Solicitation Number: ARFQ 0803 DOT2000000041

Total Bid : \$21,988.56      Response Date: 2020-05-14      Response Time: 14:52:01

Comments:

<b>FOR INFORMATION CONTACT THE BUYER</b> Tina L Lewis (304) 558-9398 tina.l.lewis@wv.gov		
Signature on File	FEIN #	DATE

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	BENDPAK HDS-27 4 POST LIFT	1.00000	EA	\$21,988.560000	\$21,988.56

Comm Code	Manufacturer	Specification	Model #
20102306			

Extended Description :	BENDPAK HDS-27 4 POST LIFT
------------------------	----------------------------

**Comments:** TLS LIFTS ARE MANUFACTURED IN NORTH AMERICA WHICH HAS HIGHER QUALITY STEEL THAN THE "CHINA" MADE PRODUCTS OUT THERE. LIFTS ARE ALI CERTIFIED. WE ARE LOCAL AND CURRENTLY TAKE CARE OF MANY OF THE DOH SHOPS AND COMPLETE ANNUAL LIFT INSPECTIONS.



**4 POST**  
TLS430FDCRx1 / TLS433FDCRx1

**MEDIUM AND LIGHT DUTY GENERAL SERVICE LIFTS**  
100% DESIGNED AND BUILT IN NORTH AMERICA


## 4 POST

**30,000 LB. / 13.6T OR  
33,000 LB. / 15T CAPACITY**

**MEDIUM DUTY COMMERCIAL LIFTS CAPABLE OF  
SAFELY SERVICING VEHICLES SMALL AND LARGE**



### OPTIONAL FEATURES

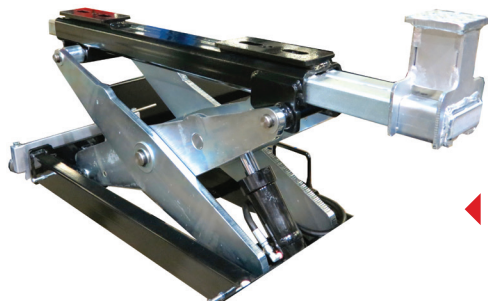

Rolling Air Hydraulic Jacks  
#TLS-RJ15

### STANDARD FEATURES



North American Power Unit / Air  
Mechanical Locking System with  
Regulator



13"/ 330 mm Machined Pulleys with  
5/8" / 15.9mm Cables



24"/ 610mm Double Wall Non  
Sag Runways

TOTAL AUTOMOTIVE LIFTING SOLUTIONS INC. 2300 SPEERS RD OAKVILLE, ON L6L 2X8 PHONE (877) 799-5438 FAX (905) 891-1214

June 2019



## 4 POST ALIGNMENT

### 4 POST SERVICE 30,000 LB. / 13.6T OR 33,000 LB. / 15T CAPACITY


STANDARD TLS430FDCRx1 / TLS433FDCRx1  
EXTENDED TLS430FDCXx1 / TLS433FDCXx1  
EXTRA LONG TLS430FDCEx1 / TLS433FDCEx1

AT TLS OUR GOAL IS TO BUILD LIFTS THAT LAST LONGER, PERFORM BETTER AND COST LESS TO OPERATE

SPECIFICATIONS	STD	EXT	X-LONG
Capacity	30,000 lb. / 13.6T or 33,000 lb. / 15T		
Overall Length	328-1/4" / 8338mm	364-1/4" / 9252mm	400-1/4" / 10166mm
Deck Length	261" / 6629mm	297" / 7544mm	333" / 8458mm
Overall Width	150" / 3810mm		
Deck Width	24" / 610mm		
Lower Height	10" / 254mm		
Raised Height	70-1/4" / 1784mm		
Maximum Wheelbase	241" / 6121mm	277" / 7036mm	313" / 7950mm
Power Requirements	230 Volt - 60hz - 1 phase - 20 amps.		
Lift Time	100 seconds		
Shipping Weight	7,500 lbs. / 3.4T		
Standard Model	4T430CSSR1 / 4T433CSSR1		
Extended Model	4T430CXSR1 / 4T433CXSR1		
Extra Long Model	4T430CESR1 / 4T433CESR1		

## EQUIPMENT FOOTPRINT

33,000 LBS HEAVY DUTY FOUR POST MODELS:  
REGULAR DECK - (21 FT)  
EXTENDED DECK - (24 FT)  
EXTRA LONG DECK - (27 FT)

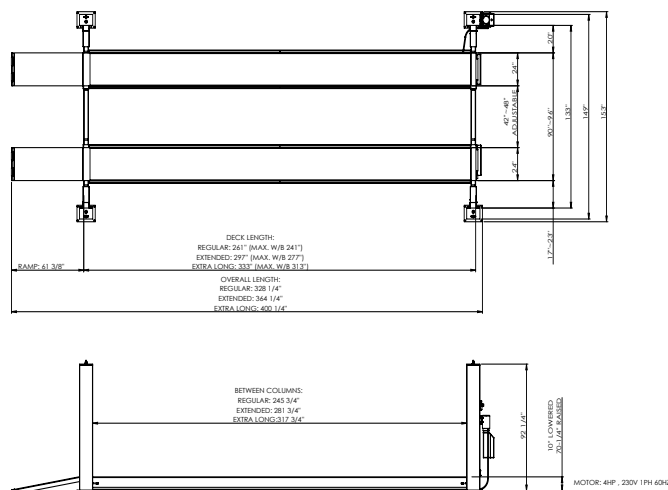

REV A-01: AS TESTED

NOTE: ANY CHANGE OF THIS PRODUCT WILL UPDATE THE REVISION OF THIS DRAWING

<b>TLS</b>		<b>TOTAL AUTOMOTIVE LIFTING SOLUTIONS INC.</b>	
REGD. PAT. 11785 TEL: 799-5438		WWW.TLSLIFTS.COM	
30,000LBS 4-POST LIFT		REV. A-01	
C. H. P. 4HP		REV. A-01	
C. H. P. 4HP		REV. A-01	
C. H. P. 4HP		REV. A-01	

## FEATURES

- Built to higher quality standard; 100% North American made - premium US Monarch (Bucher) 4HP / 3kw power unit.
- Corrosion resistant protection - steel components are wheel-a-brator shot blasted and acid washed before a "double bake" powder coat finish is applied.
- Superior structural strength provides longer life - Non flex double wall 24" / 610mm wide runways with built in "Z" rail. Heavy duty 10" x 8" x 3/8" (254mm x 213 mm x 9.5mm) wall columns and 4" x 8 x 3/8" (102mm x 213mm x 9.5mm) tall tube traverse beams.
- Greater flexibility with more models to choose from - Close between a 30,000lb. / 13.6T or 33,000lb. / 15T version. Available in three (3) runway lengths with service deck or optional with radius plate pockets. Lift can be ordered in red or blue.
- Premium options and accessories can expand the capabilities and service life - built in tire inflation hoses, removable work steps, LED runway lighting and premium 15,000lb. / 6.8T jacking beams
- Lower maintenance costs - Zirk style grease fittings at all 1-1/2" / 38mm plated hinge pins. All structural components undergo a "wheel-a-brator" steel pellet blast finish prior to a double bake powder application. This premium protection reduces corrosion and extends the life of the lift.
- Extended Life "Non Twist" Cable design - Machined steel nickel plated 12-3/4" / 324mm pulleys with bronze self lubricating bushings. Non spin fatigue resistant 5/8" / 16mm cables are routed on double stacked pulleys (versus four stacked) to reduce stress and wear.
- Low pressure hydraulics provides longer life - 5" ID x 69" / 127mm x 1753mm cylinder is mounted under the runway and use a premium "Parker" seal and wear ring with chrome plated plunger shaft.
- Designed for optimum productivity - Single point control with stainless steel cylinder air releases engage 8 locking positions. Adjustable

CONTACT US NOW

WWW.TLSLIFTS.COM OR CALL (877) 799-5438

