

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS

DATE BY

REVISION

PRINT DATE 14-JUL-2020 06:26

FRAMING PLAN CONTROL POINTS		
CODE	DESCRIPTION	DIMENSION
Α	WP 1 (STATION)	
В	WP 2 (STATION)	
С	{BEARING TO {BEARING LENGTH	
D	LENGTH FROM WP TO { DIAPHRAGM	
E	BEAM SPACING (to (
F	OFFSET FROM (FROM ROADWAY	
G	OFFSET FROM { FROM ROADWAY	
J	PRESTRESSED CONCRETE BOX BEAM SIZE (W × H)	
K	IS VENT PIPE REQUIRED? (YES/NO)	


NOTE:

OMIT INSERT ON EXTERIOR FACE OF EXTERIOR BEAMS.

ALL BEAMS ARE PARALLEL TO CENTER LINE OF ROADWAY AND ALL DIAPHRAGMS ARE PERPENDICULAR TO THE BEAMS.

REFER TO BEAM MISCELLANEOUS DETAIL SHEET FOR THREADED ROD DETAIL.

CAST 1 DIAMETER HOLES WITH PVC PIPE IN ENDS OF EACH BOX BEAM, WHEN REQUIRED, COST SHALL BE INCLUDED IN ITEM 603016, PRESTRESSED CONCRETE BOX BEAM, SEE DETAIL THIS SHEET.

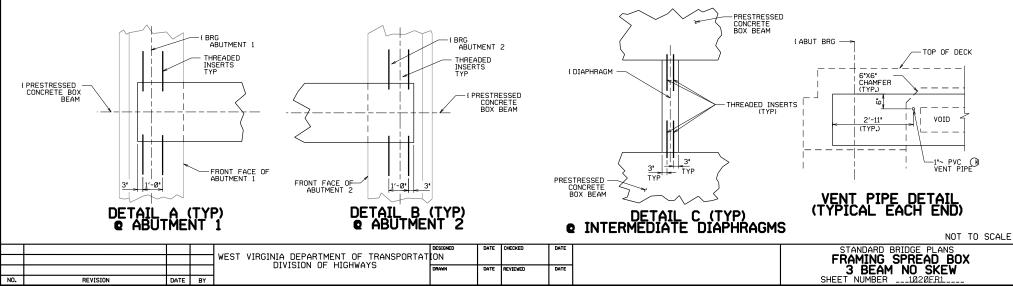

REVIEWED